

Silver Series

ERA-RC66HD(CF)

Product Range

610-650W

N-Type Rectangle Bifacial
Double Glass

650W

Maximum Power Output


0~+5W

Positive Power Tolerance

24.06%

Maximum Efficiency

ERA
SOLAR

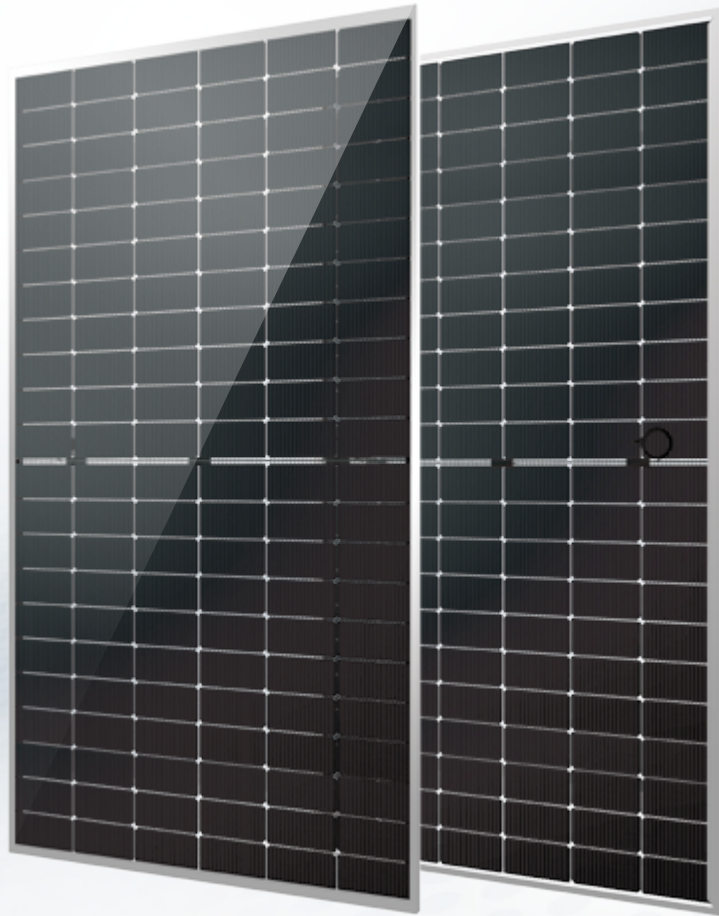


Linear Performance Warranty

15 Year Product Warranty

30 Year Linear Power Warranty

<1% First year Power Degradation

<0.4% Year 2-30 Power Degradation

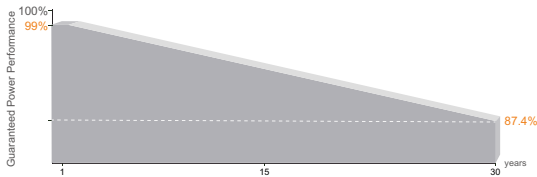

Certifications

Quality Management System and Product Certification.

IEC61215(2021), IEC61730(2023), IEC61701

IEC61215-2 (bifaciality): 2021

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018: Occupational health and safety management systems



Zhejiang ERA Solar Technology Co., Ltd.
www.erasolar.com.cn



MBB Half-Cut Rectangle Solar Cell

182x105mm, 132 cells.



Higher Module Conversion Efficiency

Higher module output up to 645W with module efficiency up to 23.88%.



Low-Light Performance

Advanced glass and surface texturing allow for excellent performance in low-light environments.



Transparent Dual-glass Design

Excellent fire rating, with better temperature coefficient.



Higher Power Output

Module power increases 5-25% generally, bringing significantly lower LCOE and higher IRR.

Double Glass, 66-CELL HALF-CUT SERIES

ELECTRICAL PARAMETERS AT STC

Module Type: ERA-RC66HD(CF)	610M	615M	620M	625M	630M	635M	640M	645M	650M
Maximum Power(Wp)	610W	615W	620W	625W	630W	635W	640W	645W	650W
Open Circuit Voltage(Voc)	48.10V	48.30V	48.50V	48.65V	48.80V	48.95V	49.10V	49.25V	49.40V
Short Circuit Current(Isc)	16.05A	16.10A	16.15A	16.20A	16.25A	16.30A	16.35A	16.40A	16.45A
Maximum Power Voltage(Vm)	39.77V	39.96V	40.15V	40.30V	40.47V	40.63V	40.80V	40.96V	41.12V
Maximum Power Current(Imp)	15.34A	15.39A	15.45A	15.51A	15.57A	15.63A	15.69A	15.75A	15.81A
Module Efficiency	22.58%	22.77%	22.95%	23.14%	23.32%	23.51%	23.69%	23.88%	24.06%
Maximum Series Fuse	30A								
Watts Positive Tolerance	0~+5W								
Number Of Diode	3								
Standard Test Conditions	1000W/M², 25°C, AM1.5								
Maximum System Voltage	1500V/DC								
Temperature-Coefficient Isc	+0.035%/°C								
Temperature-Coefficient Voc	-0.259%/°C								
Temperature-Coefficient Pmpp	-0.357%/°C								
Operating Temperature	-40°C...+85°C								
Normal Operating Cell Temperature	45±2°C								
Load Capacity For The Cover Of The Module (Glass)	5400Pa(IEC61215)(snow)								
Load Capacity For The Front & Back Of The Module	2400Pa(IEC61215)(wind)								

BNPI (1000w/m² + 135w/m²)

Module Type: ERA-RC66HD(CF)	610M	615M	620M	625M	630M	635M	640M	645M	650M
Maximum Power(Wp)	671W	677W	682W	688W	693W	699W	704W	710W	716W
Open Circuit Voltage(Voc)	48.12V	48.32V	48.51V	48.67V	48.83V	48.98V	49.12V	49.28V	49.42V
Short Circuit Current(Isc)	17.66A	17.71A	17.77A	17.83A	17.89A	17.95A	18.01A	18.07A	18.15A
Maximum Power Voltage(Vm)	39.78V	39.97V	40.17V	40.33V	40.48V	40.67V	40.82V	41.00V	41.15V
Maximum Power Current(Imp)	16.87A	16.94A	16.98A	17.06A	17.12A	17.19A	17.25A	17.32A	17.40A

BSI (1000w/m² + 300w/m²)

Module Type: ERA-RC66HD(CF)	610M	615M	620M	625M	630M	635M	640M	645M	650M
Maximum Power(Wp)	750W	756W	763W	769W	775W	781W	787W	793W	799W
Open Circuit Voltage(Voc)	48.12V	48.32V	48.50V	48.67V	48.83V	48.98V	49.15V	49.28V	49.42V
Short Circuit Current(Isc)	19.74A	19.80A	19.86A	19.93A	20.00A	20.07A	20.14A	20.21A	20.28A
Maximum Power Voltage(Vm)	39.79V	39.98V	40.15V	40.33V	40.52V	40.66V	40.85V	41.01V	41.15V
Maximum Power Current(Imp)	18.86A	18.92A	18.99A	19.07A	19.13A	19.21A	19.27A	19.34A	19.42A

MECHANICAL CHARACTERISTICS


Front Glass	2.0mm high transmittance, AR semi-tempered glass
Rear Glass	2.0mm semi-tempered glass
Cell (Quantity / Material / Dimensions)	132(6x11x2) / monocrystalline silicon, bifacial
Frame (Material / Color)	composite frame
Junction Box (Protection Degree)	≥ IP68
Cables & Plug Connectors	4mm², 300mm in length, length can be customized
Module Dimensions (L / W / H)	2382(±2)x1134(±2)x30/35mm
Module Weight	33.5kg / 34kg
Application Class	Class A
Electrical Protection Class	Class II
Fire Safety Class	Class A

PACKING


Container Size	Units/Pallet (PCS)	Weight/Pallet (KG)	Pallet Measurement (mm)	Units/Container (PCS)
40HQ	36 (30mm)	1246	2386x1120x1260	720
	31 (35mm)	1090	2386x1120x1260	620
	37 (30mm)	1243	2386x1125x1260	740

ERA SOLAR and the ERA SOLAR logo are trademarks or registered trademarks of ERA SOLAR Corporation.
© October 2024 ERA SOLAR Corporation. All rights reserved. Specifications included in this datasheet are subject to change without notice.

CURRENT-VOLTAGE CURVES:

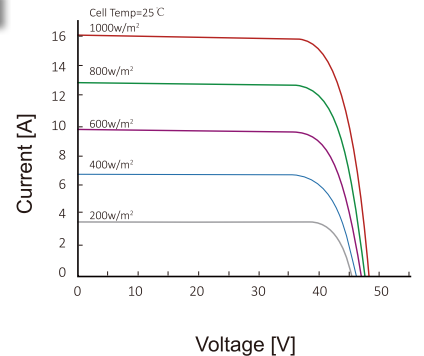

Module characteristics at constant module temperatures of 25°C and variable levels of irradiance

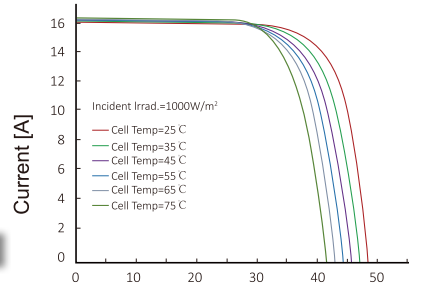

Module characteristics at variable module temperatures and constant module irradiance of 1.000 W/m²

MODULE DIAGRAM:

